
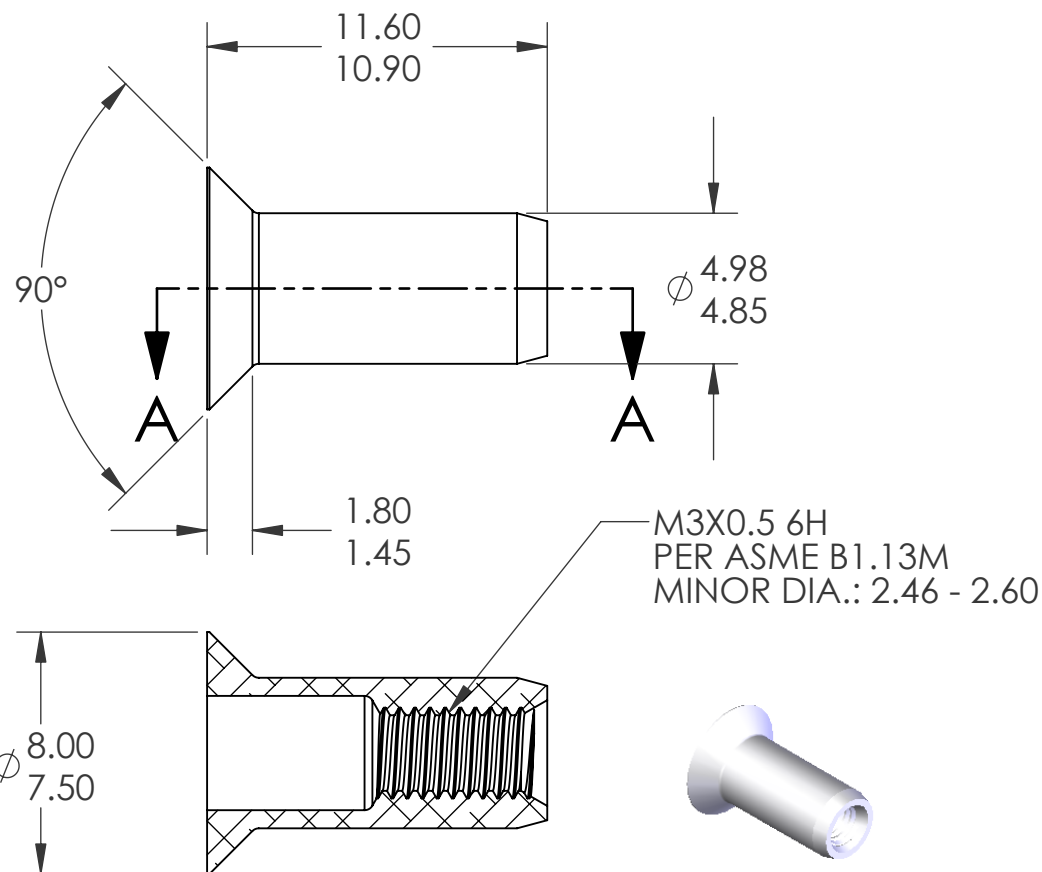


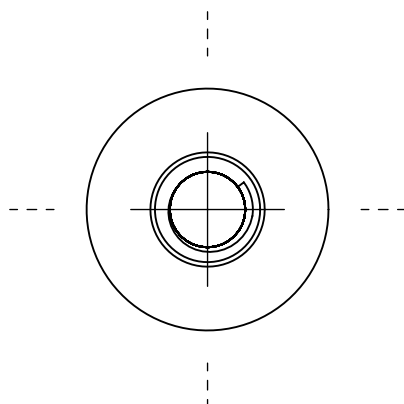

SECTION A-A

NOTE:

1. GRIP RANGE: 1.7 - 3.5
2. HOLE SIZE: 5.1 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: N/A
4. INSTALLED THREAD DEPTH:
5. LUBRICATION: NONE
6. INSTALLATION TOOL: MS 50 SPIN PULL

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE				
		DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH± 1 BEND ±1 ONE PLACE DECIMAL ±0.10 TWO PLACE DECIMAL ±0.05	DRAWN	JVK	3/7/08				
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED						
		MATERIAL	ENG APPR.	JVK	3/7/08				
		ALUMINUM ALMG 2.5 DIN 3.3523	MFG APPR.	TB	6/2/08				
		FINISH	Q.A.			TITLE: COUNTER SUNK HEAD OPEN END			
		NONE	COMMENTS:						
			E-mail: info@sherex.com						
			www.sherex.com						
			Phone: 866-474-3739						
NEXT ASSY	USED ON		Fax: 716-875-0358			SIZE DWG. NO.		REV	
						A	TU-AM3UFO35		A
APPLICATION		DO NOT SCALE DRAWING				SCALE: 2:1		WEIGHT:.0004 kg	SHEET 1 OF 1